

**SUBJECT: MECHANICAL SUSPENSION TORQUE SETTING STICKER.****Purpose**

To inform all customers on the torque settings required for mechanical suspensions.

**Scope**

Mechanical Suspension Types:


1. Underslung
2. Overslung

This sticker will be provided with each suspension kit supplied. The sticker should be attached in a visible location close to the suspension. Contact TMC Sales should you require additional stickers.

Note: All torque settings should be checked at pre-delivery, after first 500kms and thereafter every 10,000kms.

**TMC Mechanical Suspension Torques**

1. U-Bolts - 7/8" UNF	=	500/540 Nm.
U-Bolts - 1" UNF	=	750/800 Nm.
2. Torque Arm Pin Nut - 1" UNF or M24	=	180/200 Nm.
Torque Arm Pin Nut - 1" UNF or M24 (Poly)	=	250/300 Nm.
3. Torque Arm Clamp Bolt - M14	=	140/150 Nm.
4. Equaliser Shaft Nut - 1" UNF or M24	=	290/350 Nm.
Equaliser Shaft Nut - 1" UNF or M24 (Poly)	=	400/450 Nm.
5. Equaliser Drop Out Bolt - 1/2" UNF	=	75/85 Nm.

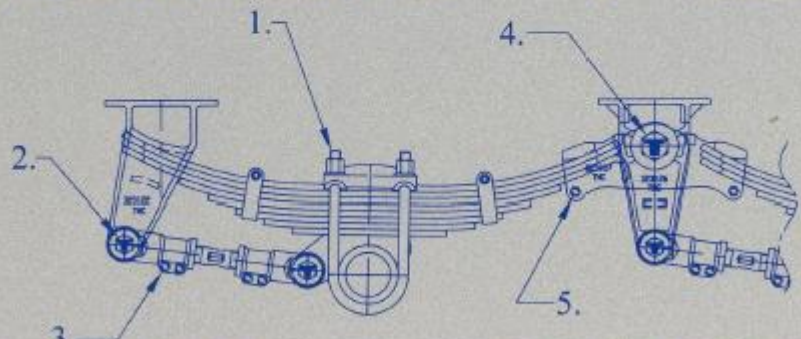

**Important: Check all torque settings at pre-delivery, after first 500kms and thereafter every 10,000kms.**